


© 1976 FERRANTI LTD. ALL RIGHTS RESERVED

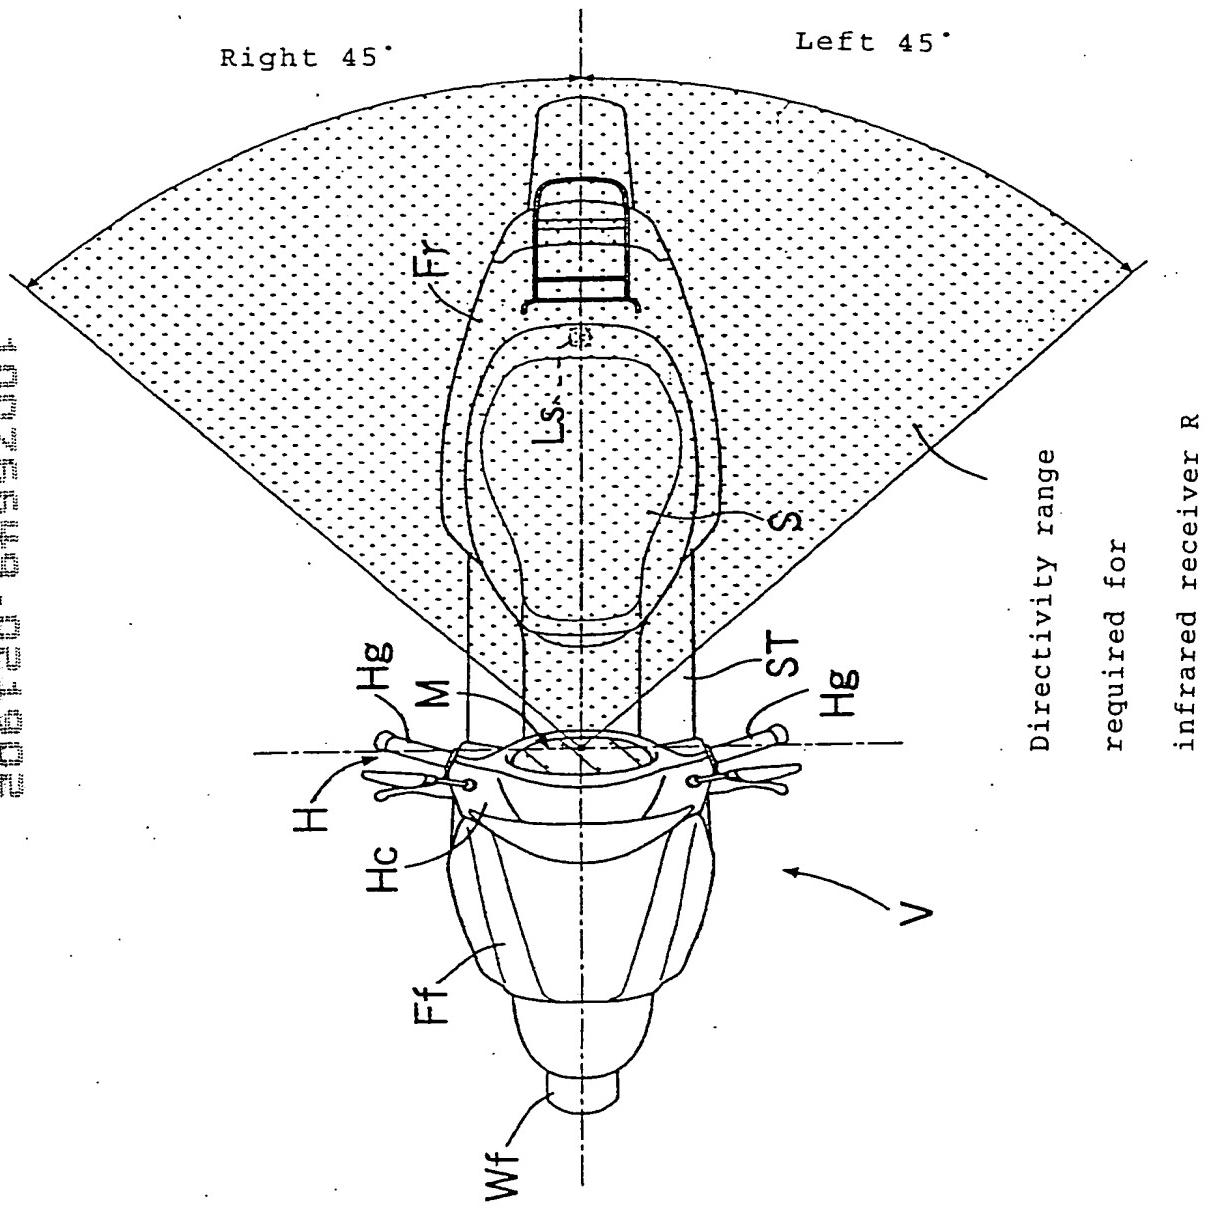

**FIG. 1**

Directivity range  
required for  
infrared receiver R

FIG. 2 "S" X 0.07


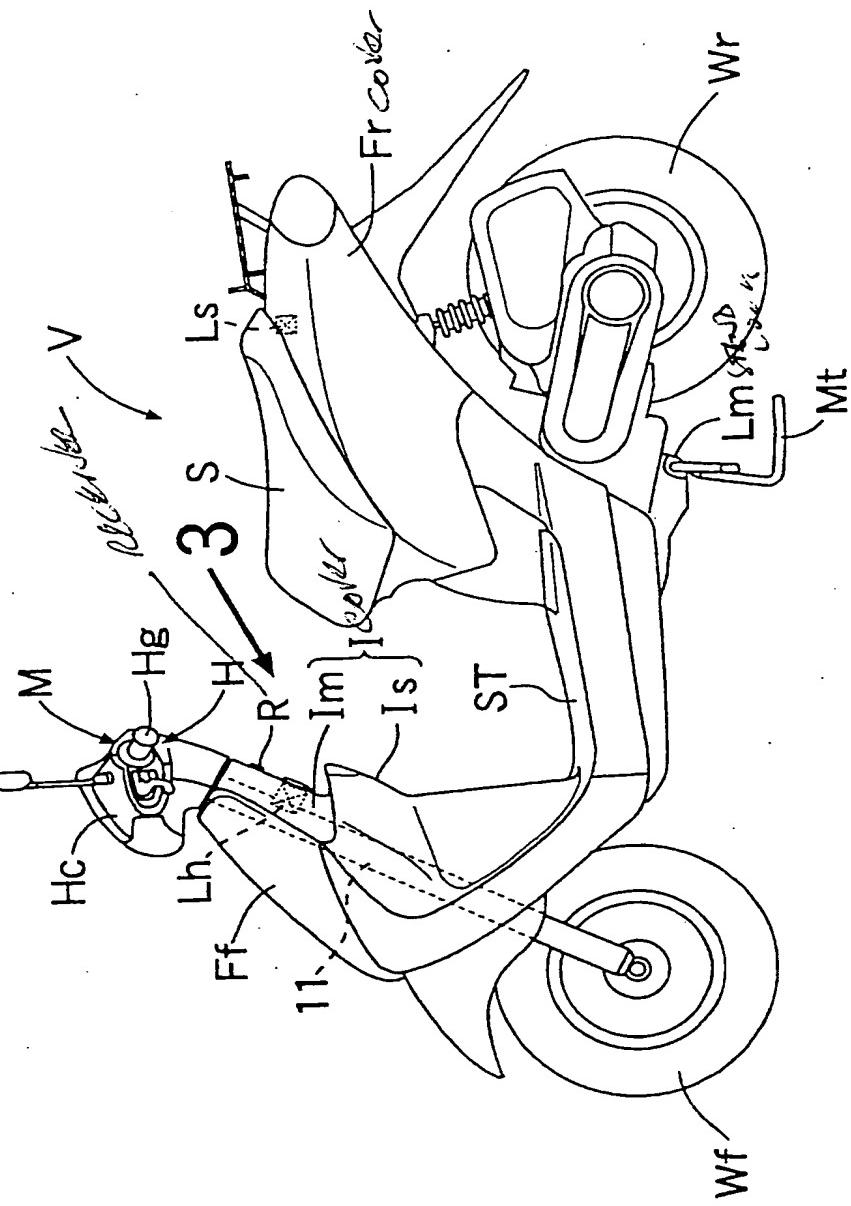


FIG. 2

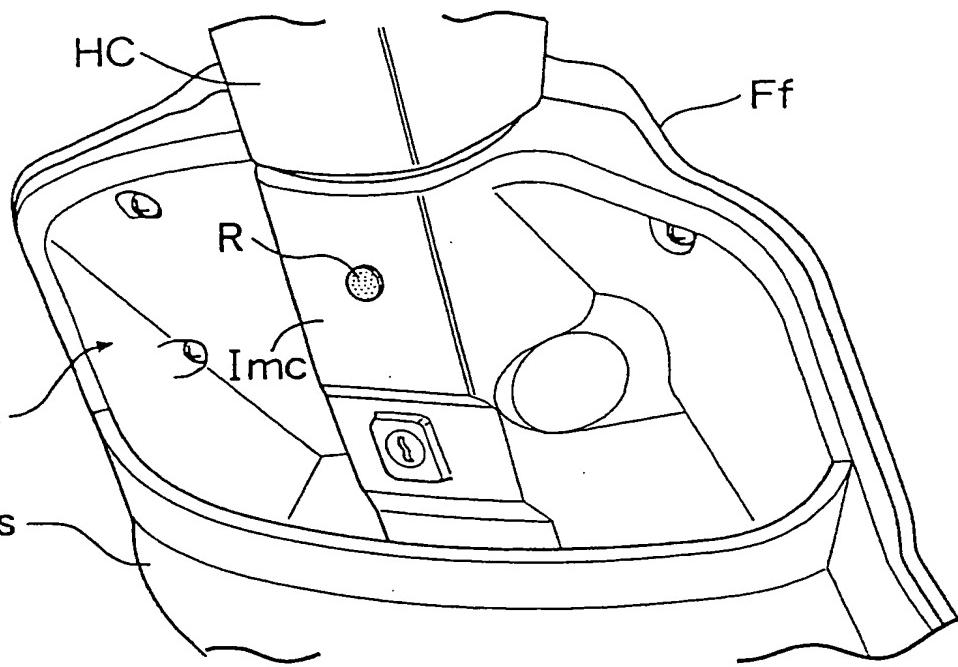

**FIG. 3**

2005 F 20 " 571932 C DCF

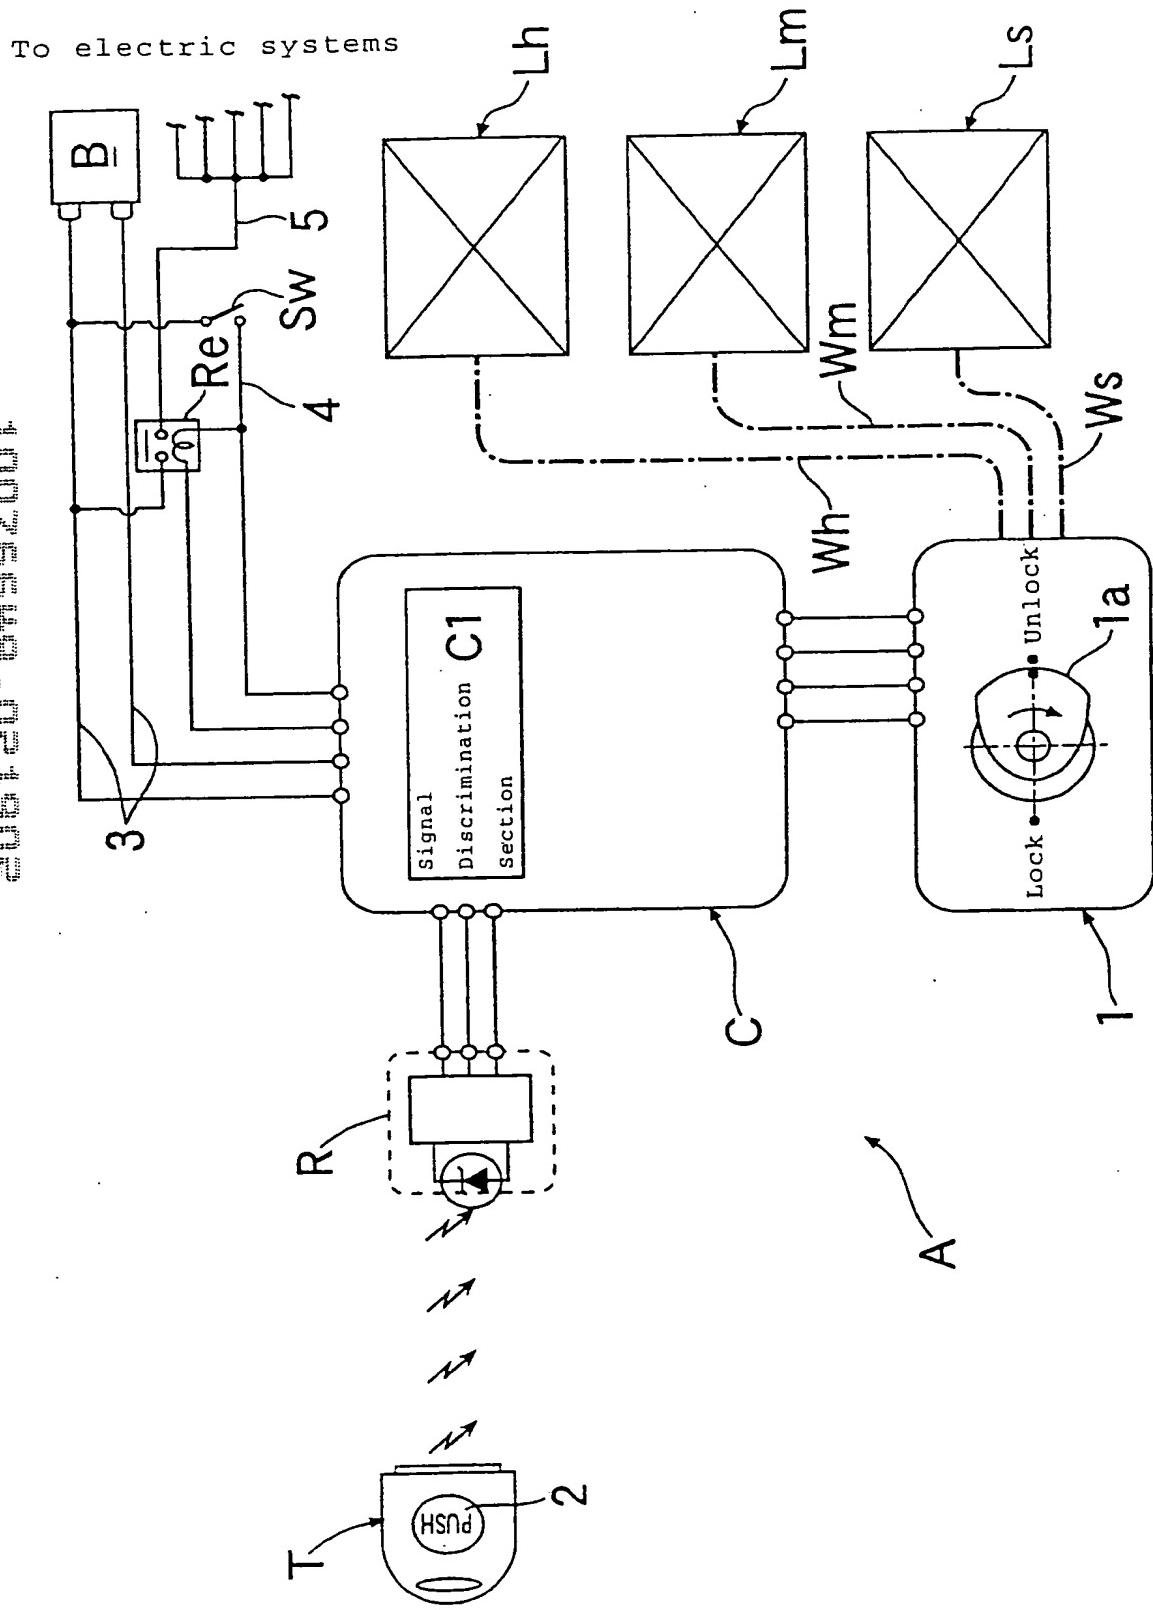


FIG. 4

100026649 - 021902



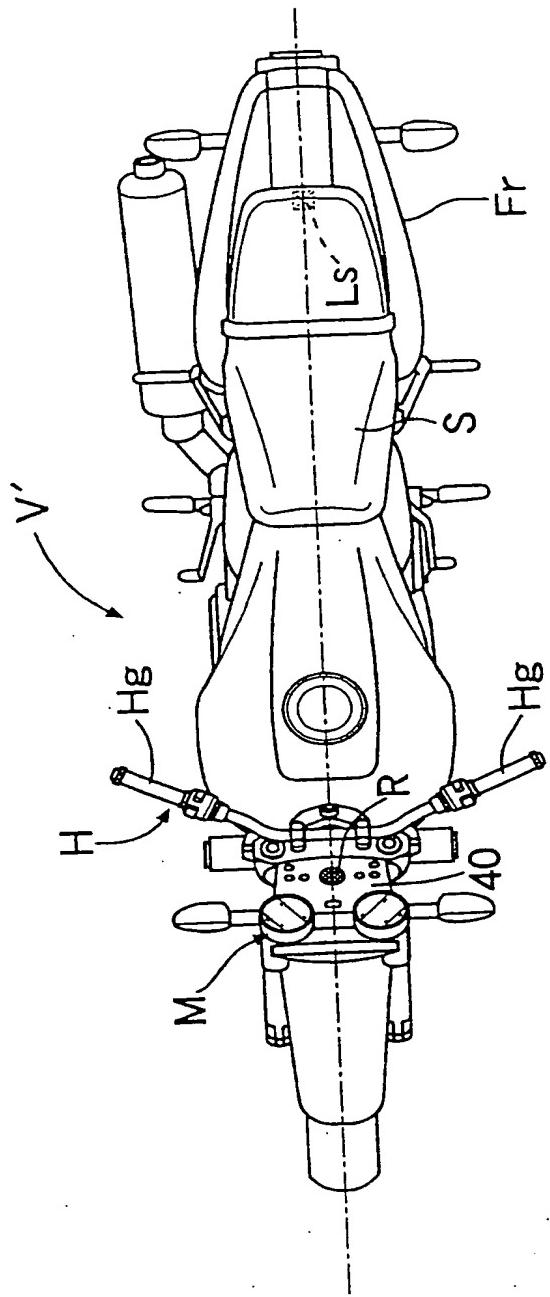


FIG. 5

FIG. 6

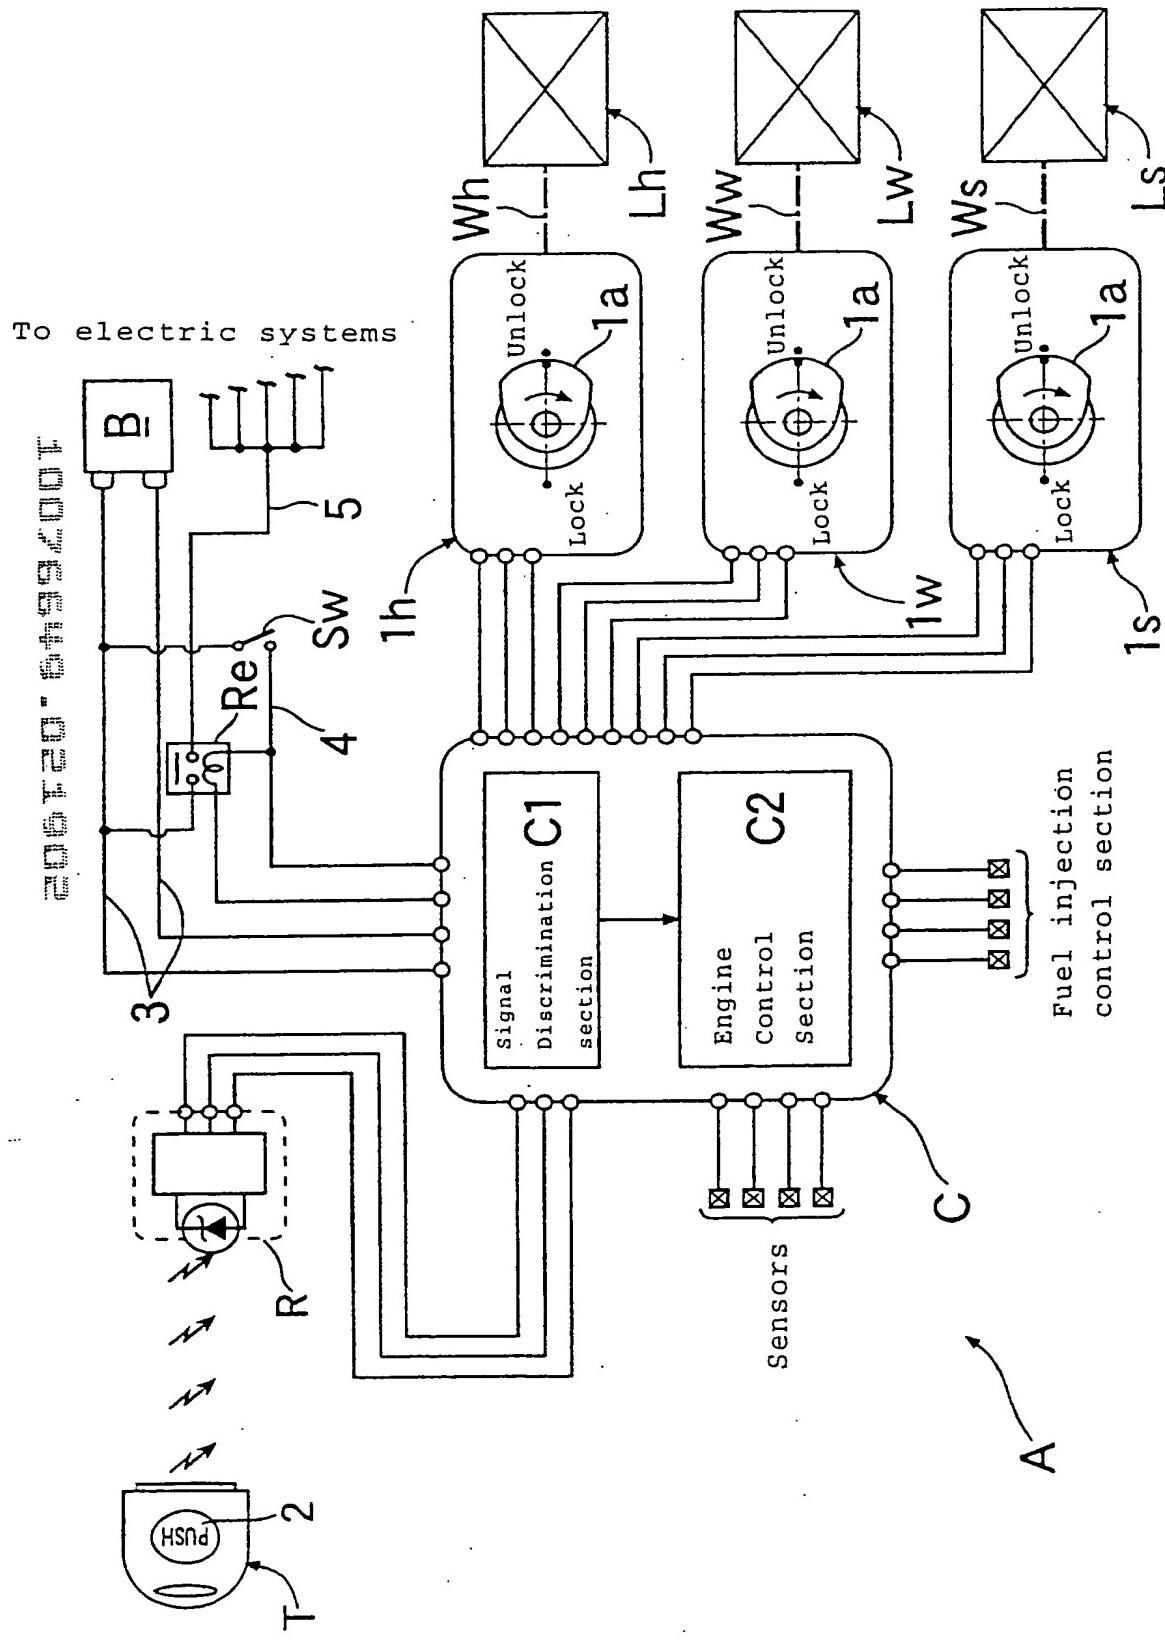


10025449 - 02 - 1900

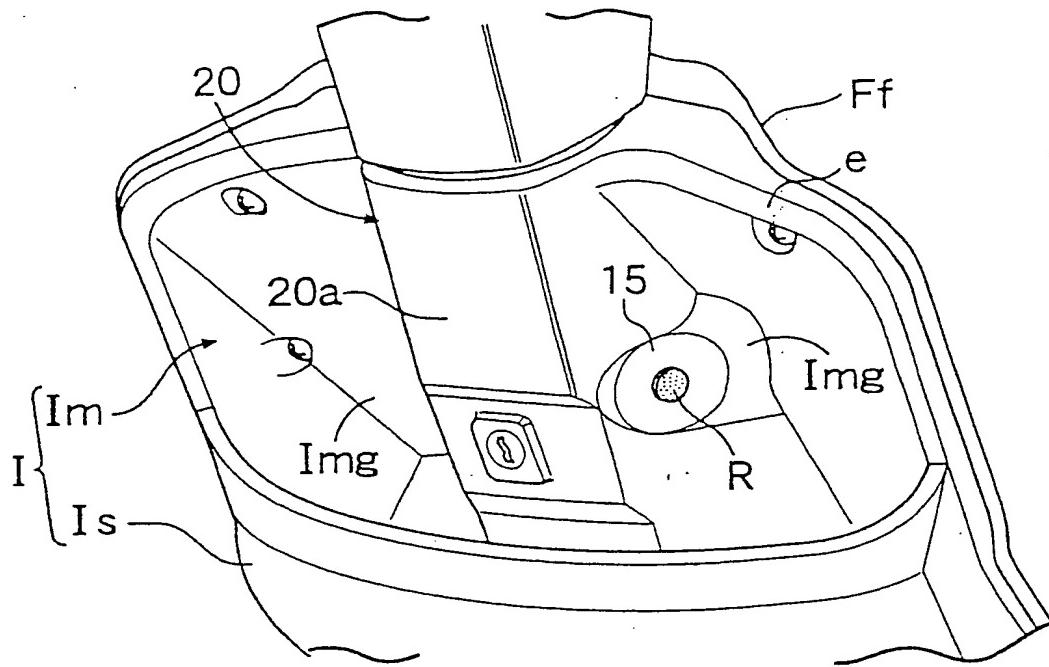

**FIG. 7**

10076644 - 821982

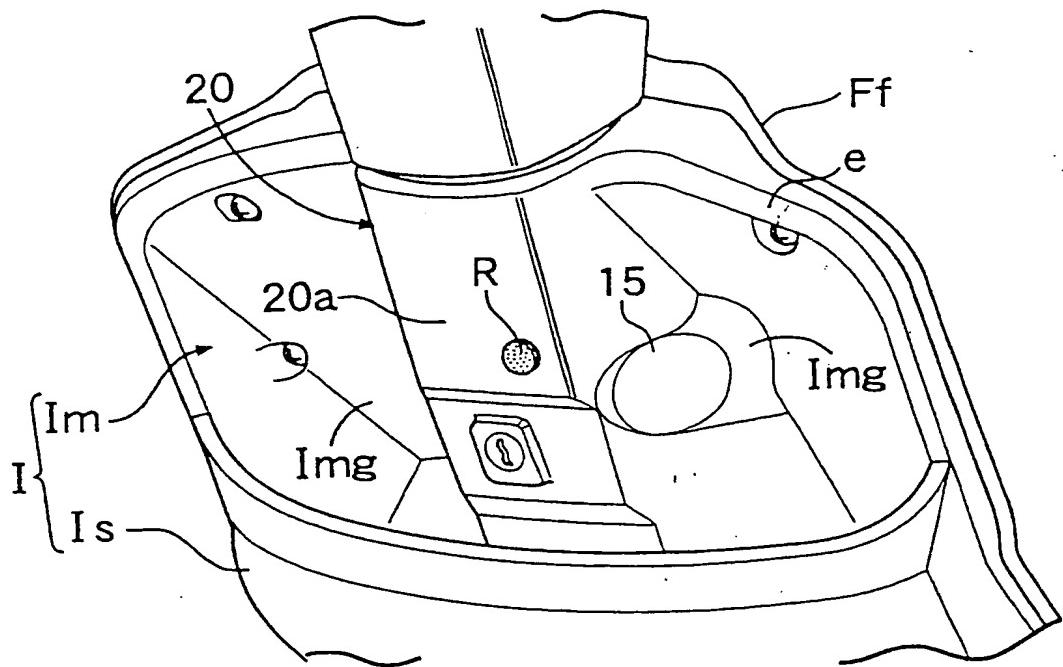

**FIG. 8**

2005 FEB 20 "SHTG 22 CCGJF"

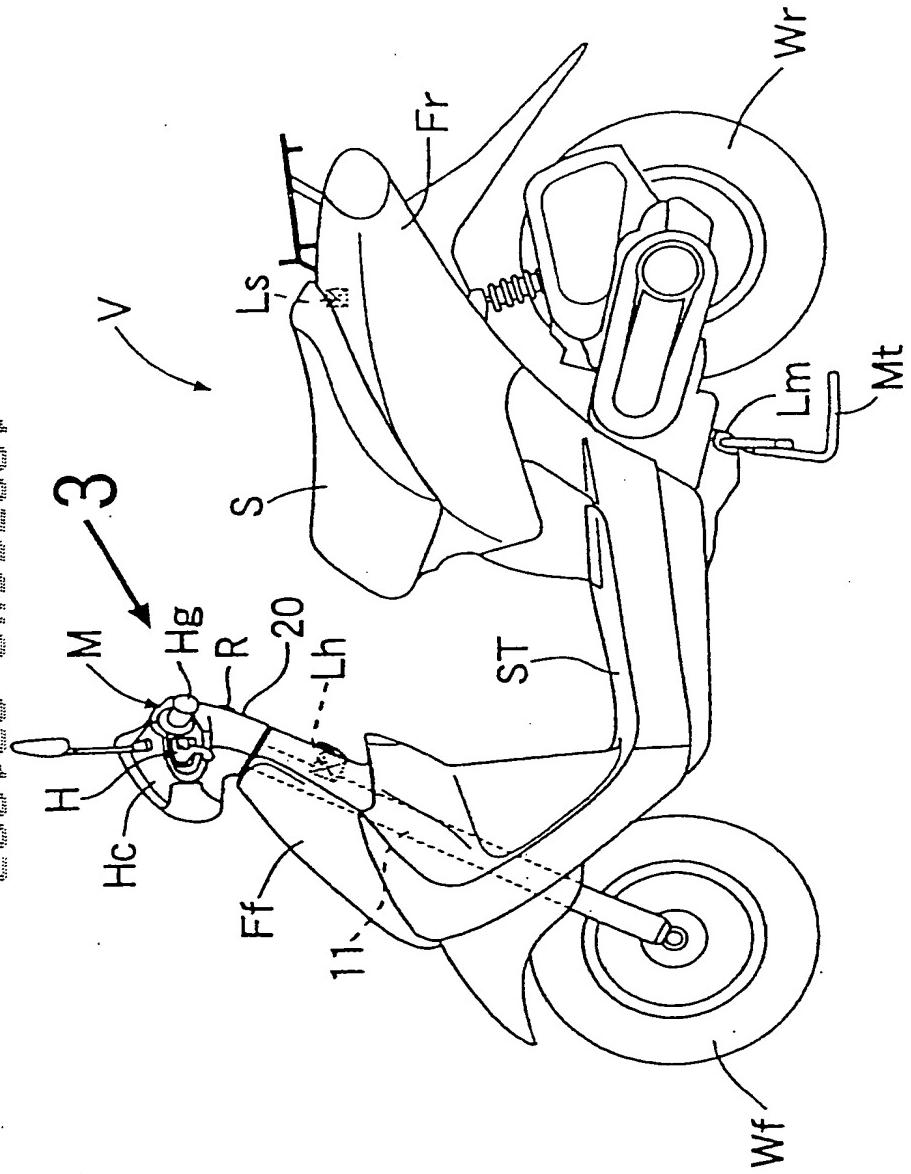


FIG. 9

20072007-2007

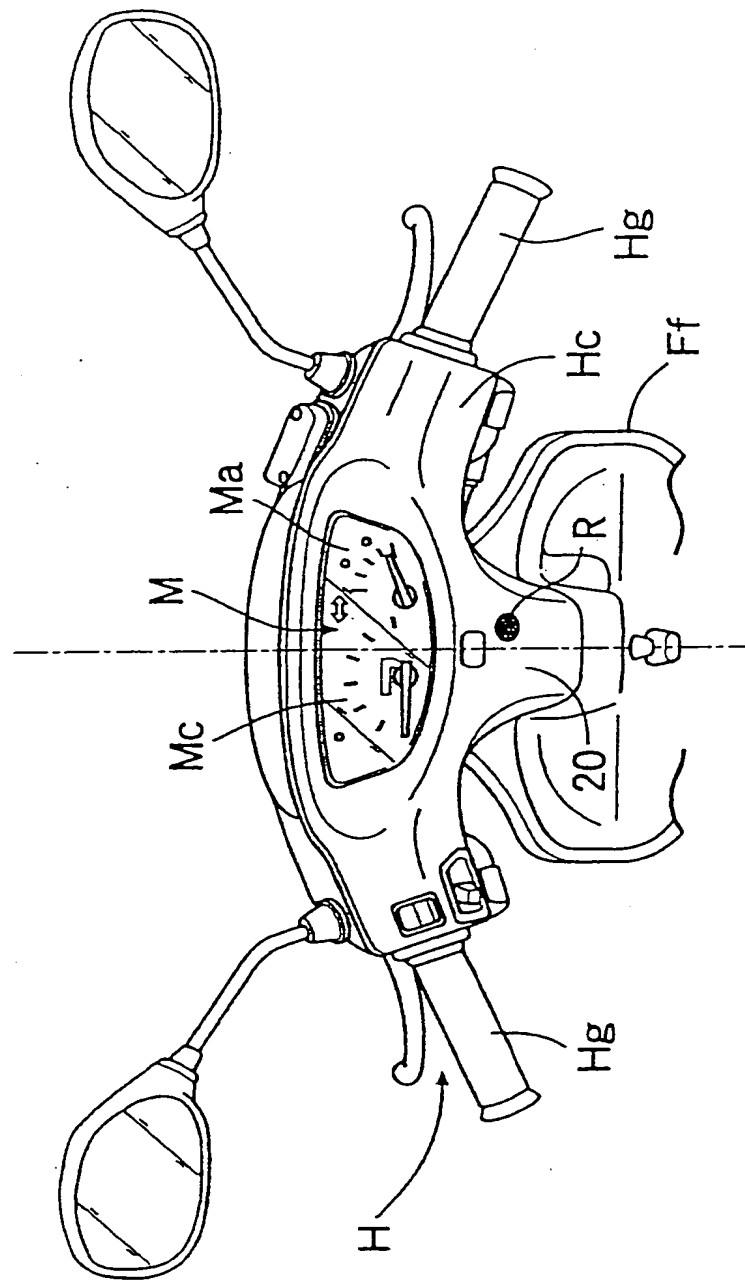


FIG. 10